



Checkpoints using ScriptArea's

First of all you make a ScriptArea large enough for the player to walk through.

I call mine **“ScriptArea_1”**

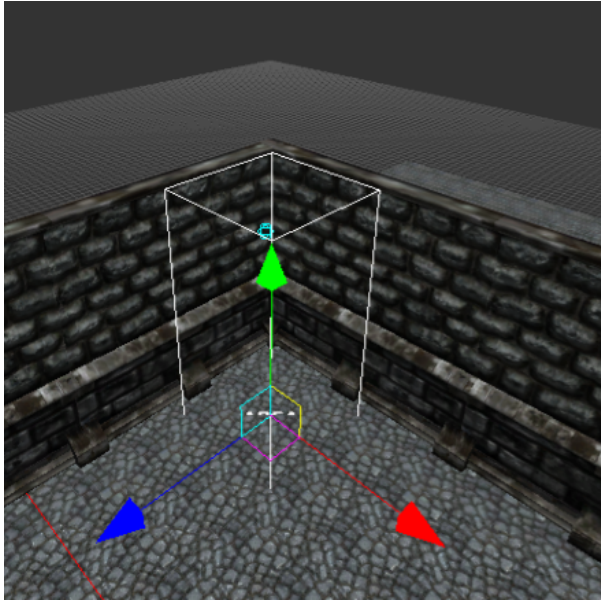

As second thing create a PlayerStartArea this time I call mine **“PlayerStartArea_1”**

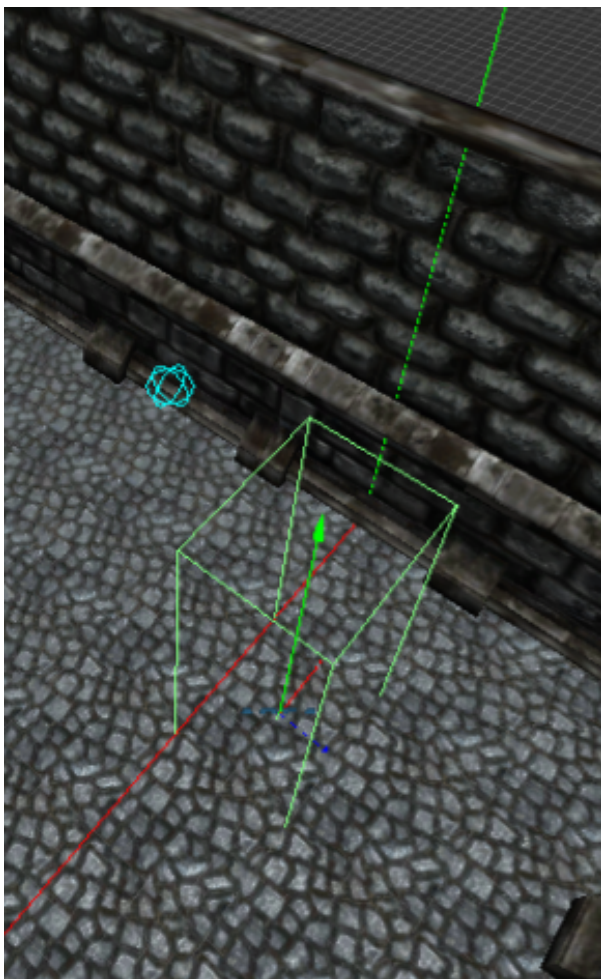

as for the script:

```
void OnStart()

{

AddEntityCollideCallback("Player", "ScriptArea_1", "Restart", true, 1);

}

void Restart(string &in asParent, string &in asChild, int alState)
{
CheckPoint ("FirstCheckpoint", "PlayerStartArea_1", "Happening", "DeathCategory", "Deathtext");
}

void Happening(string &in asName, int alCount)
{

/Stuff you want to happen after you die./

}
```

and for the .LANG file

```
<LANGUAGE>

<CATEGORY Name="DeathCategory">

<Entry Name="Deathtext">Text you want in the black screen after you die </Entry>
</CATEGORY>

</LANGUAGE>
```

Now if you die you respawn at the *PlayerStartArea* you created.

From:
<https://wiki.frictionalgames.com/> - **Frictional Game Wiki**

Permanent link:
https://wiki.frictionalgames.com/hpl2/tutorials/scripting/checkpoints_using_scriptarea_s?rev=1347791449

Last update: **2012/09/16 11:30**

